


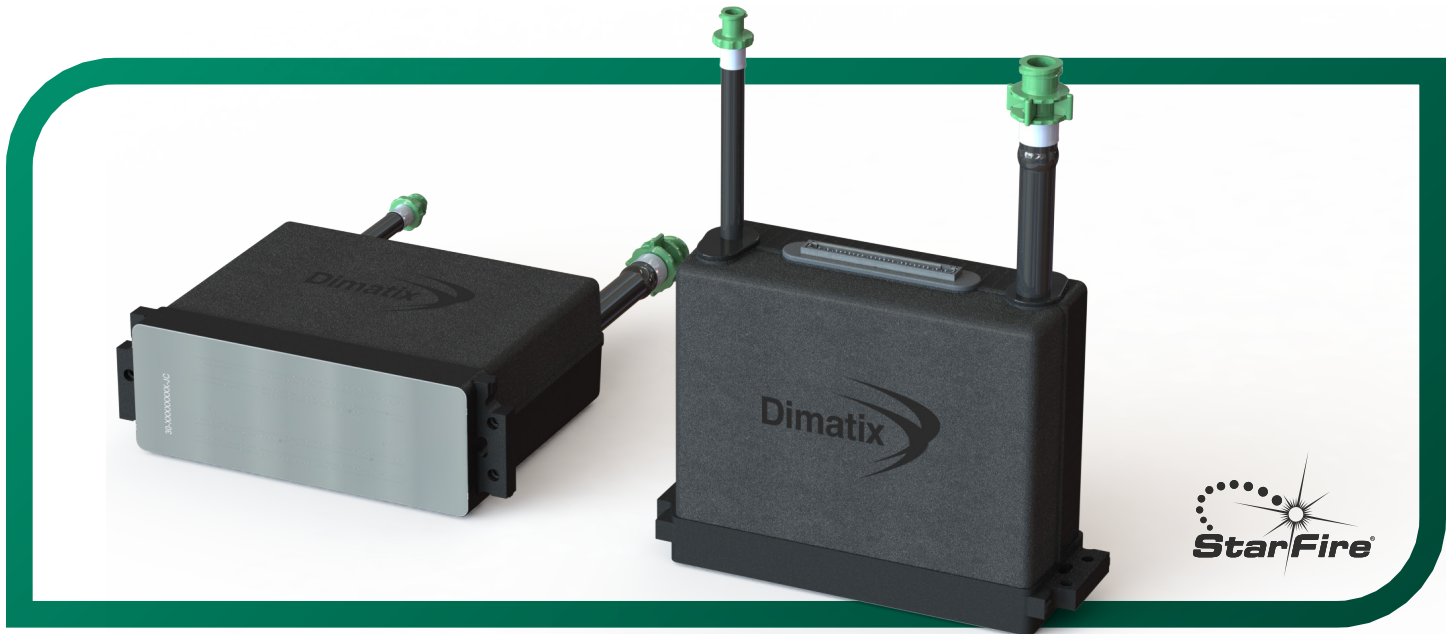

STARFIRE® SG1024 F-Series

| Designed for Aggressive Fluids

FUJIFILM Dimatix STARFIRE SG1024 next generation printhead is addressing growing market needs for a high performance and reliable printhead used with applications requiring aggressive fluids. The FUJIFILM Dimatix STARFIRE SG1024 uses field-proven materials to deliver consistent output over a long service life with REDIJET® continuous ink recirculation. The printhead is fully repairable. It is equipped with a replaceable metal nozzle plate assembly that is designed to withstand abrasion and resist damage. Incorporating 10+ years of continued innovations the FUJIFILM Dimatix STARFIRE SG1024 printhead platform is designed to support binder-jet applications that use aggressive fluids while providing high-part fidelity and system uptime.

Performance

- 400dpi resolution with drop sizes ranging from 30–200pL that allow for optimal and efficient use of fluids
- Reliably use challenging jetting fluids
- Versadrop binary and grayscale jetting with open and editable waveform utility
- Supporting varying product needs from prototyping to high-end production systems

Productivity

- High fluid laydown of 50 grams per square meter of ink per minute* at production speed for high-quality output
- REDIJET® — Dual recirculation for reliable jetting & fast system start-up
- Maximize Uptime for high productivity and return on investment

*20kHz with 200pL drop using test fluid

Durability

- Industrial capabilities meet customer demands in production environments
- Robust (repairable) design enabling cost-effective maintenance and support
- Cost-effective repairs and maintenance


Support

- Backed by an exceptional support organization
- Dedicated worldwide field organization to ensure successful product development
- Lab and quality assurance investigative team to ensure satisfaction with FUJIFILM Dimatix products through your product lifecycle

Technical Specifications

STARFIRE SG1024	M3F	L3F
Number of Addressable Jets / Module	1024	
Print Width (mm/in)	64.96 (2.55)	
Native Resolution (dpi)	400	
Firing Frequency (kHz)	30 / 12	20 / 12
Versadrop Max Productivity (ng-kHz)	300	1500
Native Drop Size / Largest Drop Size (pL)	30 / 80	80 / 200
Nozzle Plate Technology	Metal	
Compatible Fluids	Aggressive fluids used in sand casting and metal sintering	
Viscosity Range (cP)	8–20 (10–14 for highest productivity)	
Temperature Control	Yes	
Inkjet Operating Temperature Range (C/F)	Up to 50°C / 122°F	
Integrated Temperature Sensor	Included	
OEM Accessible Non-volatile Memory	64-byte rewritable	

Physical Characteristics

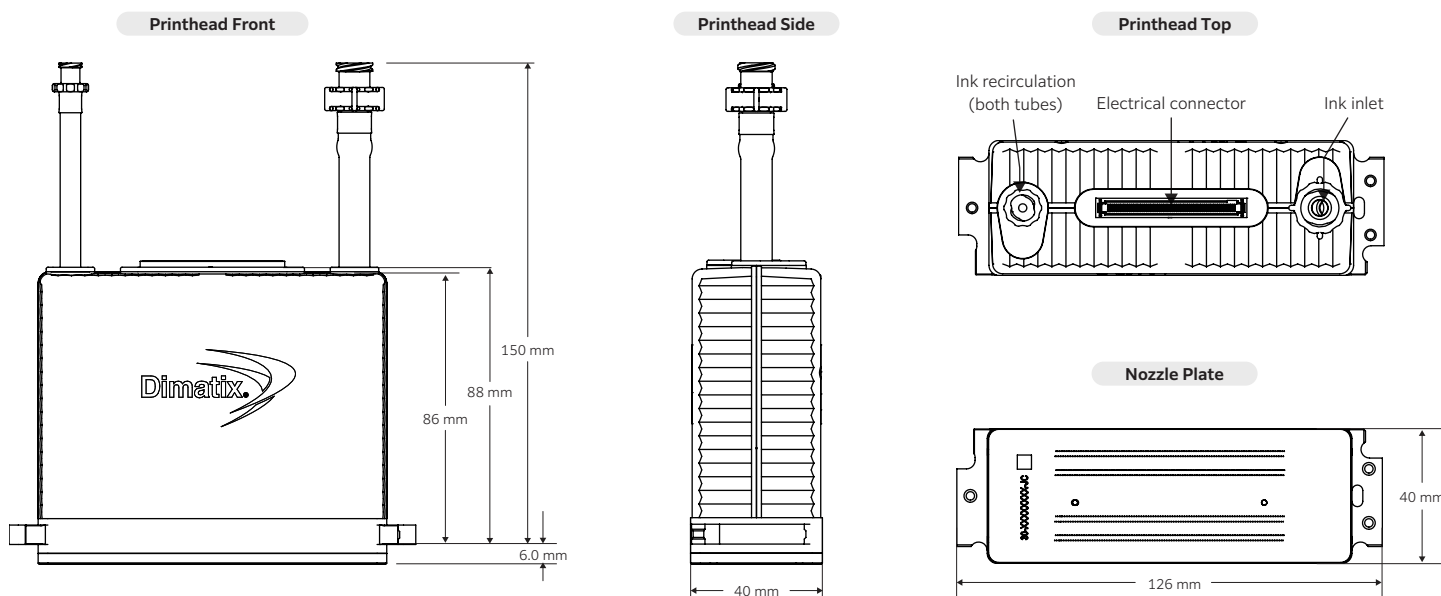

Product characteristics and depictions are not drawn to scale and are general illustrations only. Technical specifications above may vary based on usage conditions and overall system environment.

For design and engineering work using this STARFIRE printhead, please contact Dimatix Technical Support for the appropriate Product Manual containing full Product Specifications.

FUJIFILM

Corporate Office:
FUJIFILM Dimatix, Inc.
2250 Martin Avenue
Santa Clara, CA 95050
USA
Tel: 1 (408) 565-9150
info@dimatix.com

New Hampshire Facility:
FUJIFILM Dimatix, Inc.
109 Etna Road
Lebanon, NH 03766
USA
Tel: 1 (603) 443-5300
info@dimatix.com

Inkjet Business Division:
FUJIFILM Corporation
7-3, Akasaka 9-chome
Minato-ku, Tokyo 107-0052
Japan
Tel: +81 3 6271 3971
dgi-ff-ijhead@fujifilm.com

China Office:
FUJIFILM Dimatix China
Service Center Building 30,
1000 Jinhai Road
Pudong New Area, Shanghai
China 201206
china@dimatix.com

Europe Office:
euro@dimatix.com
Korea Office:
mdkorea@dimatix.com
Singapore Office:
mdsingapore@dimatix.com
Taiwan Office:
mdtaiwan@dimatix.com

www.fujifilm.com/us/en/business/inkjet-solutions

PDS00161, Rev0.1, May 2024

FUJIFILM and the FUJIFILM logo, DIMATIX, STARFIRE and the STARFIRE logo, REDUJET and the REDUJET logo are trademarks of the FUJIFILM Corporation and its affiliates.
© 2024 FUJIFILM Dimatix, Inc. All rights reserved.